

Qlite UltraSlim Digital Signage Kiosk



Panel Size : 43" | 49" | 55" | 65" Alloy Frame



10 touch - Capacitive screen



Brightness : 500 nits | 700 nits



Professional Heavy Duty displays for 24 x 7 operation



Display Life 50000 hours



Cloud Computing and USB Support



Only 18mm think, very light weight



Ultra - HD resolution




Android | Windows 10 OS

Model	QLGG-ELED-LS43
Panel Information	
Panel Size	43"
Panel Type	TFT-LCD,E-LED
Display area	943.2 x 531.4mm
Resolution	3840 x 2160
Brightness	500 Nits
Contrast Ratio	5000:1
Touch Type	10 Point Infrared Touch
Viewing Angle	178/178
Aspect Ratio	16:9
LED Life Time	60,000 hours
Motherboard	
Operating System	Android 11.0 (Option: Windows OS)
CPU	Quad Core 1.8GHz 64bits, RK3288 (option : RK3399)
Memory	DDR3 4GB
Storage	TSD Flash 32GB
Network	Wifi, RJ45
Languages	English, Germany, French, Italian, Japanese, Korean, Russian, Spanish, etc.
I/O Ports	USB 2.0 x2, Micro USB OTG x1, Stereo Mini Jack 3.5mm x1, RJ45 x1, HDMI Out x1 Standard MicroSD Card Slot x1 (Support Max 32G)
Speakers	10W x2
Environment	
Operating System	0°C ~ 50°C
Storage System	-20°C ~ 60°C
Power	
Power Supply	96~264 V
Rated Frequency	50/60Hzw
Accessories	
Power Cord x1, Remote Control x1, Digital Manual x1, Key x1	

43" Screen Size

Physical Dimensions (43")

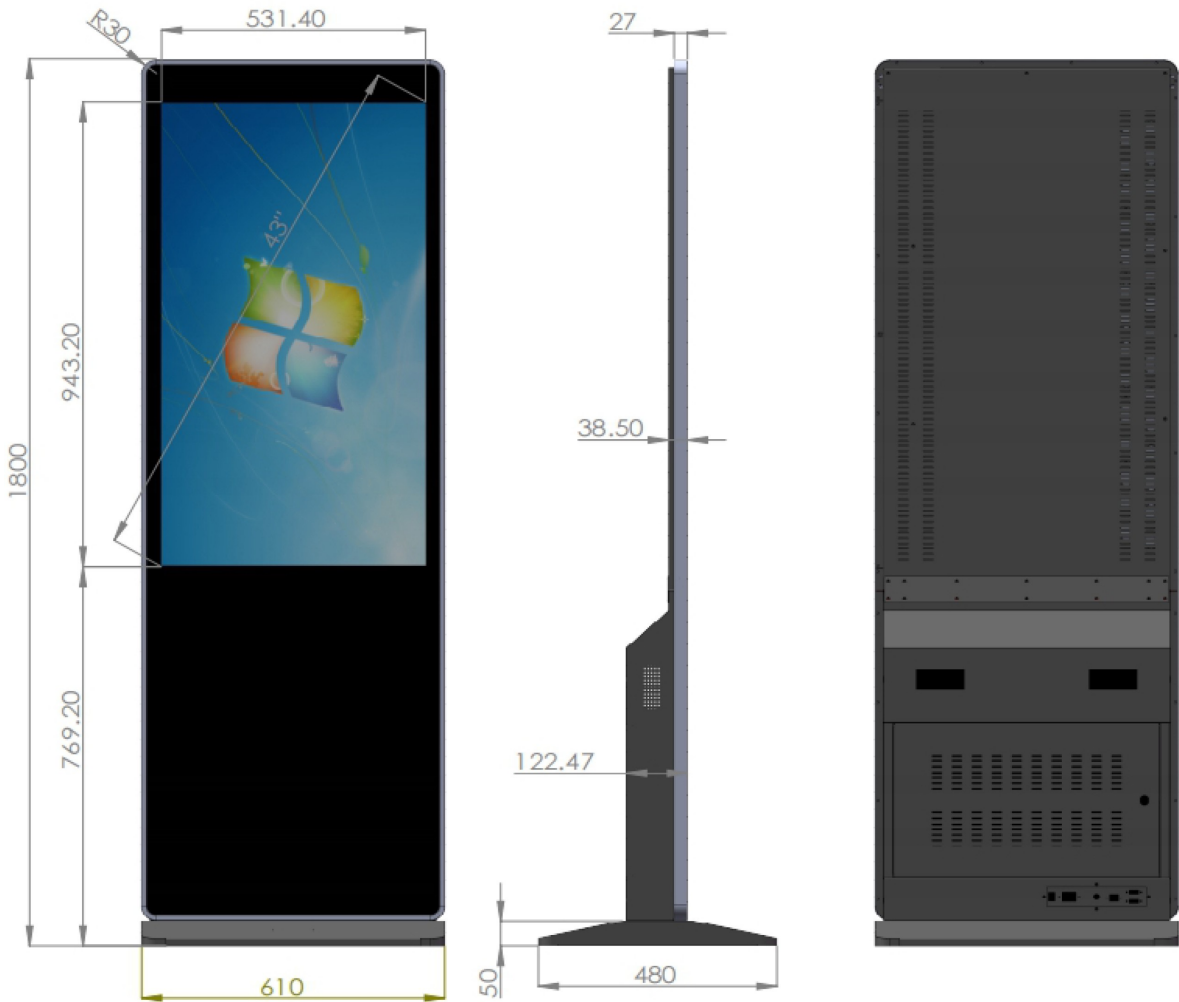

49" Screen Size

Model	QLGG-ELED-LS50
Panel Information	
Panel Size	49"
Panel Type	TFT-LCD, E-LED
Active Area	1078 x 608 mm
Resolution	3840 x 2160
Brightness	500 Nits
Contrast Ratio	5000:1
Viewing Angle	178/178
Aspect Ratio	16:9
Touch Type	10 Point Infrared Touch
LED Life Time	60,000 hours
Motherboard	
Operating System	Android 11.0 (Option: Windows OS)
CPU	Quad Core 1.8GHz 64bits, RK3288(Option: RK3399)
Memory	DDR3 4GB
Storage	TSD Flash 16 32GB
Network	Wifi, RJ45
Languages	English, Germany, French, Italian, Japanese, Korean, Russian, Spanish, etc.
I/O Ports	USB 2.0 x2, Micro USB OTG x1, Stereo Mini Jack 3.5mm x1, RJ45 x1, HDMI Out x1 Standard MicroSD Card Slot x1 (Support Max 32G)
Speakers	10W x2
Environment	
Operating System	0°C ~ 50°C
Storage System	-20°C ~ 60°C
Power	
Power Supply	96~264 V
Rated Frequency	50/60Hz
Accessories	
Power Cord x1, Remote Control x1, Digital Manual x1, Key x1	


Physical Dimensions(49")



Model	QLGG-ELED-LS55
Panel Information	
Panel Size	55"
Panel Type	TFT-LCD, E-LED
Active Area	1211.6 x 682.4 mm
Resolution	3840 x 2160
Brightness	500 Nits
Contrast Ratio	5000:1
Viewing Angle	178/178
Aspect Ratio	16:9
Touch Type	10 Point Infrared Touch
LED Life Time	60,000 hours
Motherboard	
Operating System	Android 11.0 (Option: Windows OS)
CPU	Quad Core 1.8GHz 64bits, RK3288 (Option: RK3399)
Memory	DDR3 4GB
Storage	TSD Flash 32GB
Network	Wifi, RJ45
Languages	English, Germany, French, Italian, Japanese, Korean, Russian, Spanish, etc.
I/O Ports	USB 2.0 x2, Micro USB OTG x1, Stereo Mini Jack 3.5mm x1, RJ45 x1, HDMI Out x1 Standard MicroSD Card Slot x1 (Support Max 32G)
Speakers	10W x2
Environment	
Operating System	0°C ~ 50°C
Storage System	-20°C ~ 60°C
Power	
Power Supply	96~264 V
Rated Frequency	50/60Hz
Accessories	
Power Cord x1, Remote Control x1, Digital Manual x1, Key x1	

55" Screen Size

Physical Dimensions(55")

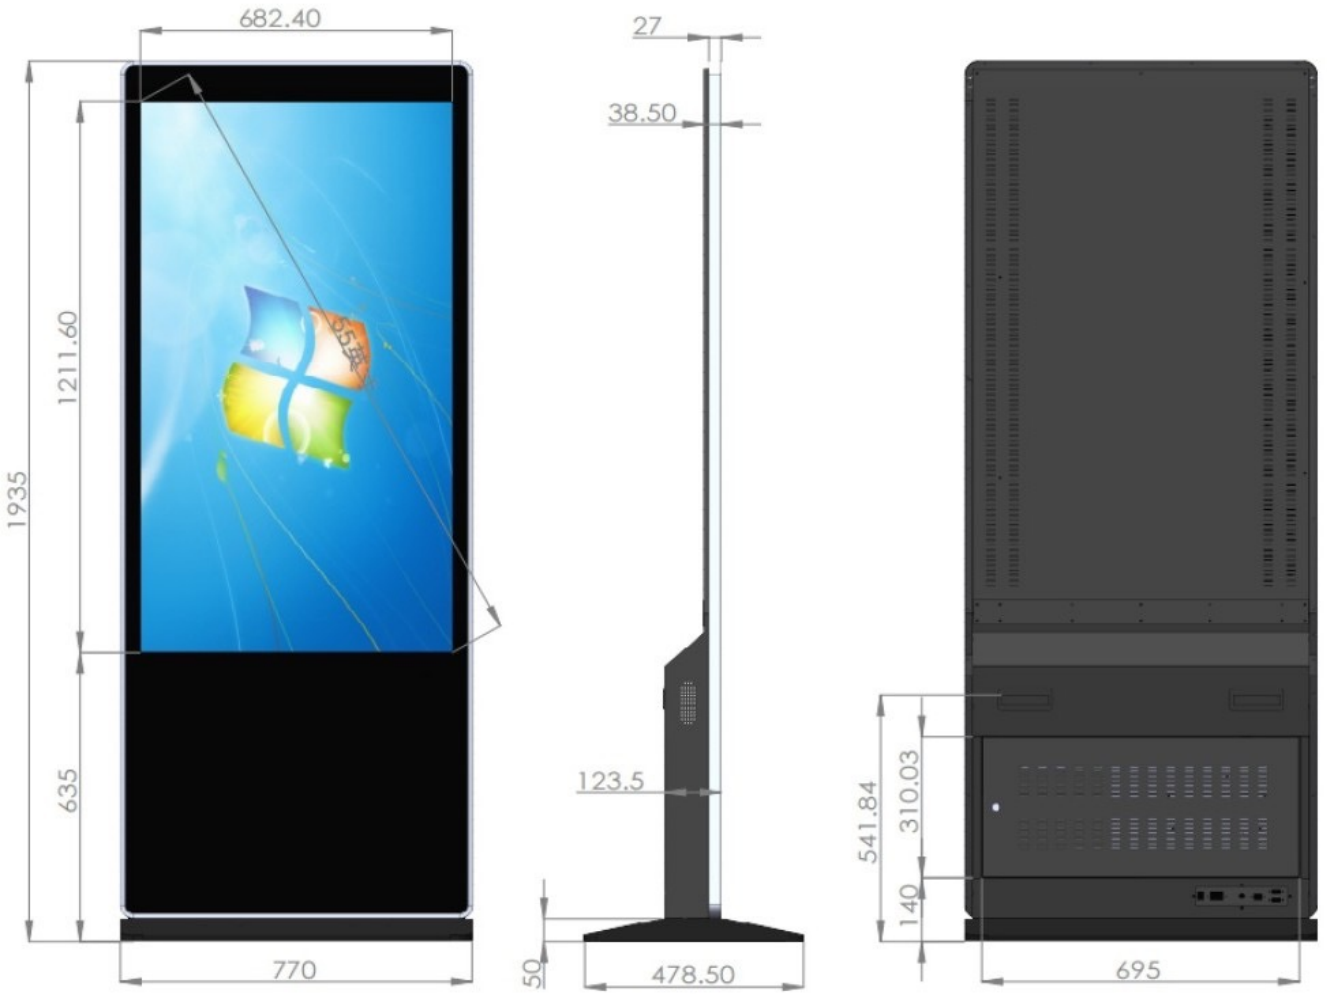

65" Screen Size

Model	QLGG-ELED-LS65
Panel Information	
Panel Size	65"
Panel Type	TFT-LCD, E-LED
Active Area	1430.5 x 805.5 mm
Resolution	3840 x 2160
Brightness	500 Nits
Contrast Ratio	5000:1
Viewing Angle	178/178
Aspect Ratio	16:9
Touch Type	10 Point Infrared Touch
LED Life Time	60,000 hours
Motherboard	
Operating System	Android 11.0 (Option: Windows OS)
CPU	Quad Core 1.8GHz 64bits, RK3288 (RK3399)
Memory	DDR3 4GB
Storage	TSD Flash 32GB
Network	Wifi, RJ45
Languages	English, Germany, French, Italian, Japanese, Korean, Russian, Spanish, etc.
I/O Ports	USB 2.0 x2, Micro USB OTG x1, Stereo Mini Jack 3.5mm x1, RJ45 x1, HDMI Out x1 Standard MicroSD Card Slot x1 (Support Max 32G)
Speakers	10W x2
Environment	
Operating System	0°C ~ 50°C
Storage System	-20°C ~ 60°C
Power	
Power Supply	96~264 V
Rated Frequency	50/60Hz
Accessories	
Power Cord x1, Remote Control x1, Digital Manual x1, Key x1	

Physical Dimensions(65")

