

## Qlite UltraSlim Digital Signage Kiosk



Panel Size : 43" | 49" | 55" | 65" Alloy Frame



Brightness : 350 nits | 700 nits



Professional Heavy Duty displays for 24 x 7 operation



Display Life 50000 hours



Cloud Computing and USB Support



Only 18mm think, very light weight



Full HD resolution





Android/Windows10 OS

<b>Model</b>	<b>QLGG-ELED-LS43</b>
<b>Panel Information</b>	
<b>Panel Size</b>	43"
<b>Panel Type</b>	TFT-LCD,E-LED
<b>Display area</b>	943.2 x 531.4mm
<b>Resolution</b>	1920 x 1080
<b>Brightness</b>	350 Nits
<b>Contrast Ratio</b>	1400:1
<b>Viewing Angle</b>	178/178
<b>Aspect Ratio</b>	16:9
<b>LED Life Time</b>	60,000 hours
<b>Motherboard</b>	
<b>Operating System</b>	Android 6.0/7.1 (Option: Windows OS)
<b>CPU</b>	Quad Core 1.8GHz 64bits, RK3288
<b>Memory</b>	DDR3 2G
<b>Storage</b>	TSD Flash 8G
<b>Network</b>	Wifi, RJ45
<b>Languages</b>	English, Germany, French, Italian, Japanese, Korean, Russian, Spanish, etc.
<b>I/O Ports</b>	USB 2.0 x2, Micro USB OTG x1, Stereo Mini Jack 3.5mm x1, RJ45 x1, HDMI Out x1 Standard MicroSD Card Slot x1 (Support Max 32G)
<b>Speakers</b>	10W x2
<b>Environment</b>	
<b>Operating System</b>	0°C ~ 50°C
<b>Storage System</b>	-20°C ~ 60°C
<b>Power</b>	
<b>Power Supply</b>	96~264 V
<b>Rated Frequency</b>	50/60Hzw
<b>Accessories</b>	
<b>Power Cord x1, Remote Control x1, Digital Manual x1, Key x1</b>	

# 43" Screen Size

## Physical Dimensions

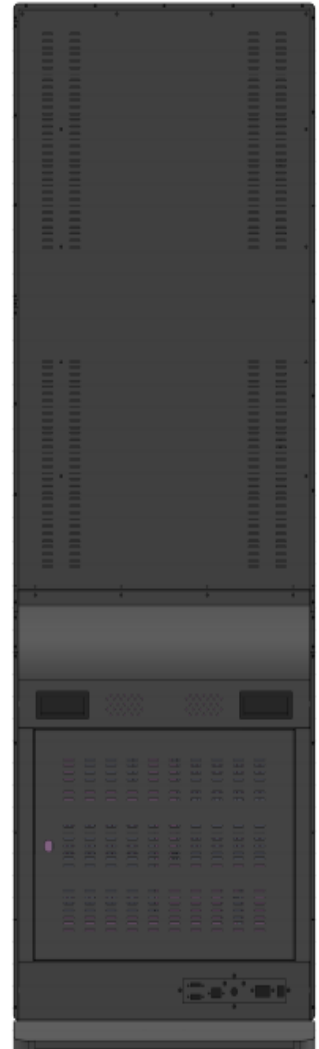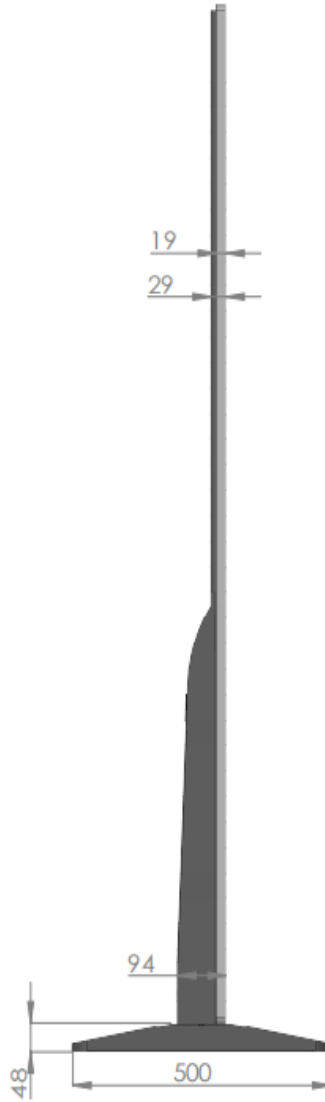


# 49" Screen Size

---

<b>Model</b>	<b>QLGG-ELED-LS50</b>
<b>Panel Information</b>	
<b>Panel Size</b>	49"
<b>Panel Type</b>	TFT-LCD, E-LED
<b>Active Area</b>	1078 x 608 mm
<b>Resolution</b>	1920 x 1080
<b>Brightness</b>	350 Nits
<b>Contrast Ratio</b>	1400:1
<b>Viewing Angle</b>	178/178
<b>Aspect Ratio</b>	16:9
<b>LED Life Time</b>	60,000 hours
<b>Motherboard</b>	
<b>Operating System</b>	Android 6.0/ 7.1(Option: Windows OS)
<b>CPU</b>	Quad Core 1.8GHz 64bits, RK3288
<b>Memory</b>	DDR3 2G
<b>Storage</b>	TSD Flash 8G
<b>Network</b>	Wifi, RJ45
<b>Languages</b>	English, Germany, French, Italian, Japanese, Korean, Russian, Spanish, etc.
<b>I/O Ports</b>	USB 2.0 x2, Micro USB OTG x1, Stereo Mini Jack 3.5mm x1, RJ45 x1, HDMI Out x1 Standard MicroSD Card Slot x1 (Support Max 32G)
<b>Speakers</b>	10W x2
<b>Environment</b>	
<b>Operating System</b>	0°C ~ 50°C
<b>Storage System</b>	-20°C ~ 60°C
<b>Power</b>	
<b>Power Supply</b>	96~264 V
<b>Rated Frequency</b>	50/60Hz
<b>Accessories</b>	
<b>Power Cord x1, Remote Control x1, Digital Manual x1, Key x1</b>	


## Physical Dimensions

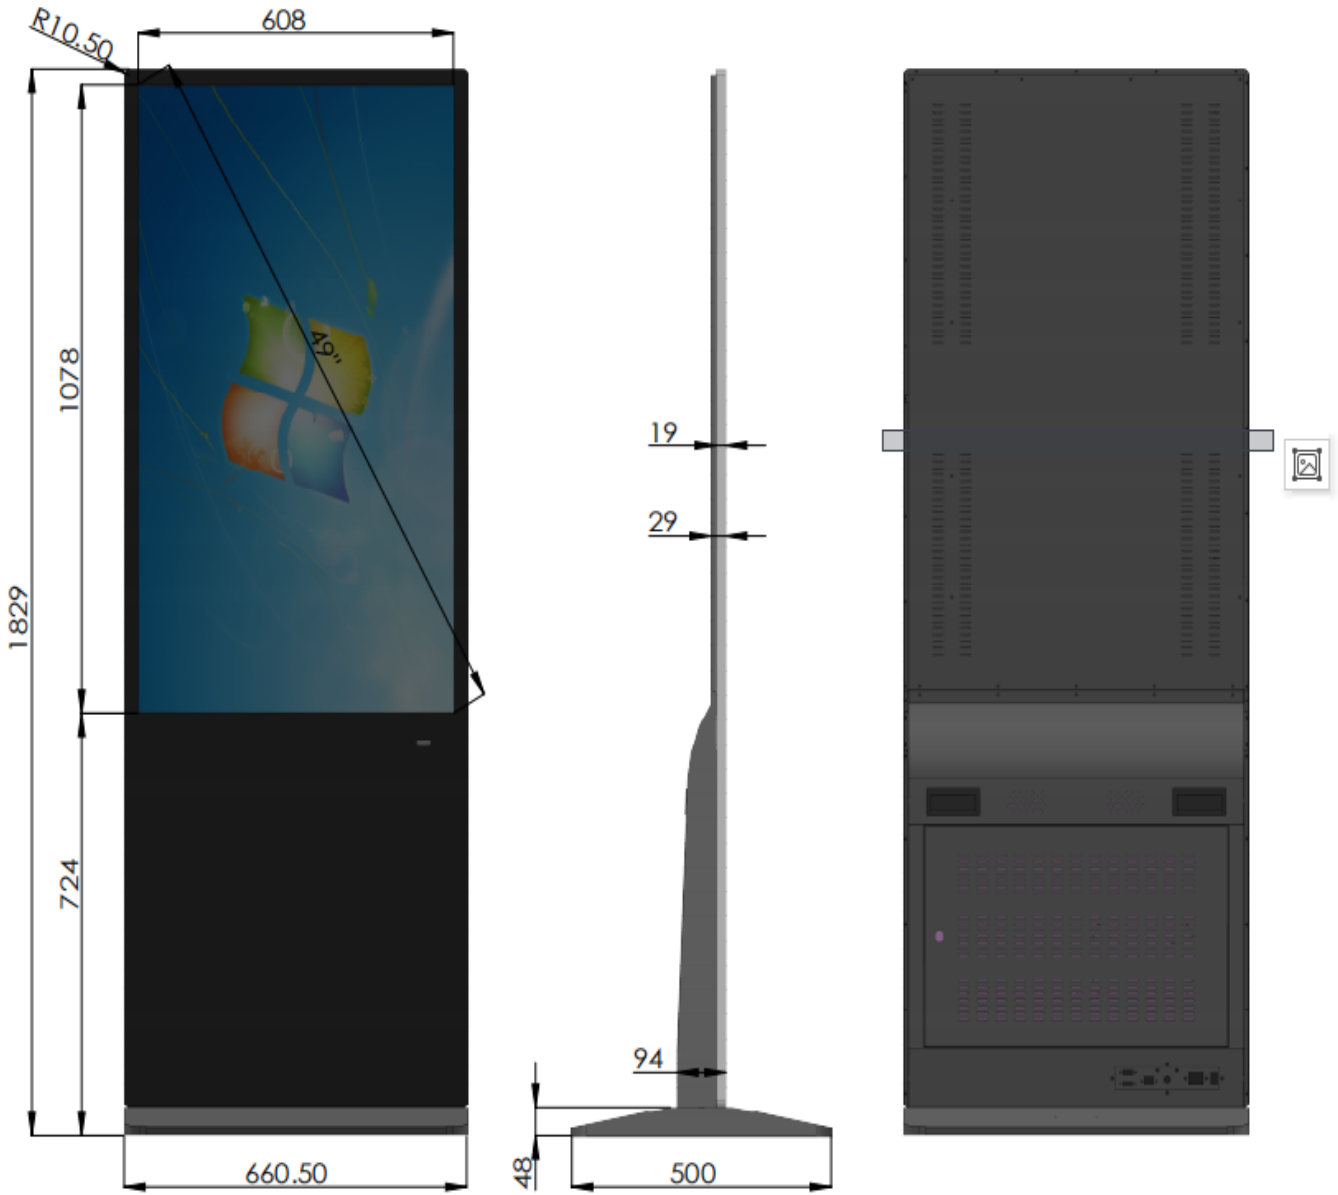

<b>Model</b>	<b>CSGG-ELED-LS55</b>
<b>Panel Information</b>	
<b>Panel Size</b>	55"
<b>Panel Type</b>	TFT-LCD, E-LED
<b>Active Area</b>	1211.6 x 682.4 mm
<b>Resolution</b>	1920 x 1080
<b>Brightness</b>	350 Nits
<b>Contrast Ratio</b>	1400:1
<b>Viewing Angle</b>	178/178
<b>Aspect Ratio</b>	16:9
<b>LED Life Time</b>	60,000 hours
<b>Motherboard</b>	
<b>Operating System</b>	Android 6.0/7.1 (Option: Windows OS)
<b>CPU</b>	Quad Core 1.8GHz 64bits, RK3288
<b>Memory</b>	DDR3 2G
<b>Storage</b>	TSD Flash 8G
<b>Network</b>	Wifi, RJ45
<b>Languages</b>	English, Germany, French, Italian, Japanese, Korean, Russian, Spanish, etc.
<b>I/O Ports</b>	USB 2.0 x2, Micro USB OTG x1, Stereo Mini Jack 3.5mm x1, RJ45 x1, HDMI Out x1 Standard MicroSD Card Slot x1 (Support Max 32G)
<b>Speakers</b>	10W x2
<b>Environment</b>	
<b>Operating System</b>	0°C ~ 50°C
<b>Storage System</b>	-20°C ~ 60°C
<b>Power</b>	
<b>Power Supply</b>	96~264 V
<b>Rated Frequency</b>	50/60Hz
<b>Accessories</b>	
Power Cord x1, Remote Control x1, Digital Manual x1, Key x1	

# 55" Screen Size

## Physical Dimensions

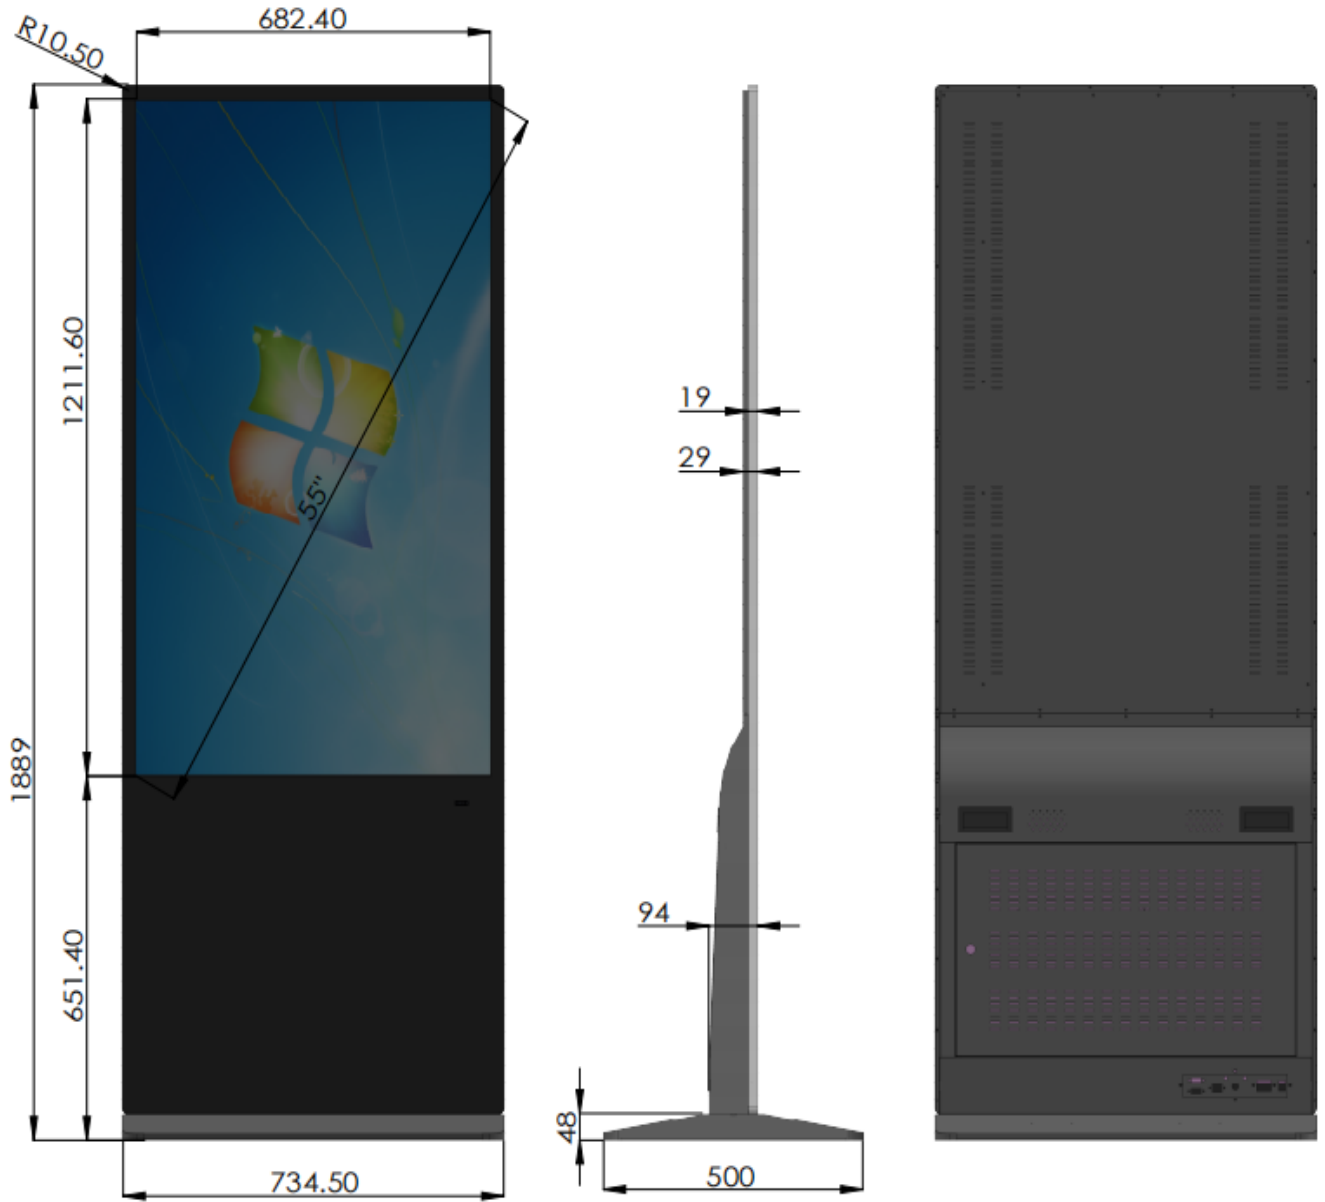




# 65" Screen Size

---

<b>Model</b>	<b>CSGG-ELED-LS65</b>
<b>Panel Information</b>	
<b>Panel Size</b>	65"
<b>Panel Type</b>	TFT-LCD, E-LED
<b>Active Area</b>	1430.5 x 805.5 mm
<b>Resolution</b>	1920 x 1080
<b>Brightness</b>	420 Nits
<b>Contrast Ratio</b>	1400:1
<b>Viewing Angle</b>	178/178
<b>Aspect Ratio</b>	16:9
<b>LED Life Time</b>	60,000 hours
<b>Motherboard</b>	
<b>Operating System</b>	Android 6.0/7.1(Option: Windows OS)
<b>CPU</b>	Quad Core 1.8GHz 64bits, RK3288
<b>Memory</b>	DDR3 2G (4G option)
<b>Storage</b>	TSD Flash 8G (16G,32G option)
<b>Network</b>	Wifi, RJ45
<b>Languages</b>	English, Germany, French, Italian, Japanese, Korean, Russian, Spanish, etc.
<b>I/O Ports</b>	USB 2.0 x2, Micro USB OTG x1, Stereo Mini Jack 3.5mm x1, RJ45 x1, HDMI Out x1 Standard MicroSD Card Slot x1 (Support Max 32G)
<b>Speakers</b>	10W x2
<b>Environment</b>	
<b>Operating System</b>	0°C ~ 50°C
<b>Storage System</b>	-20°C ~ 60°C
<b>Power</b>	
<b>Power Supply</b>	96~264 V
<b>Rated Frequency</b>	50/60Hz
<b>Accessories</b>	
<b>Power Cord x1, Remote Control x1, Digital Manual x1, Key x1</b>	



## Physical Dimensions

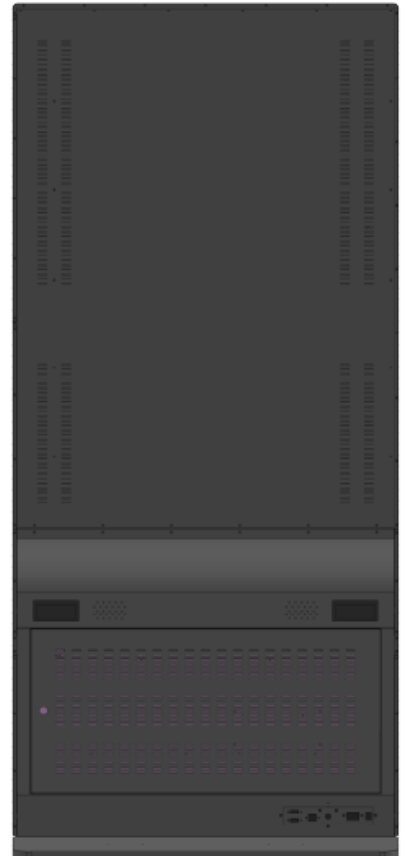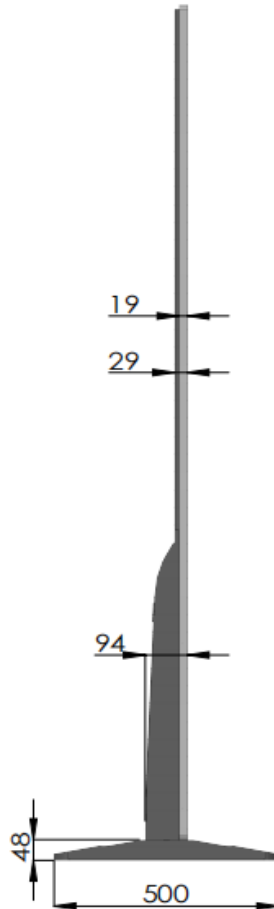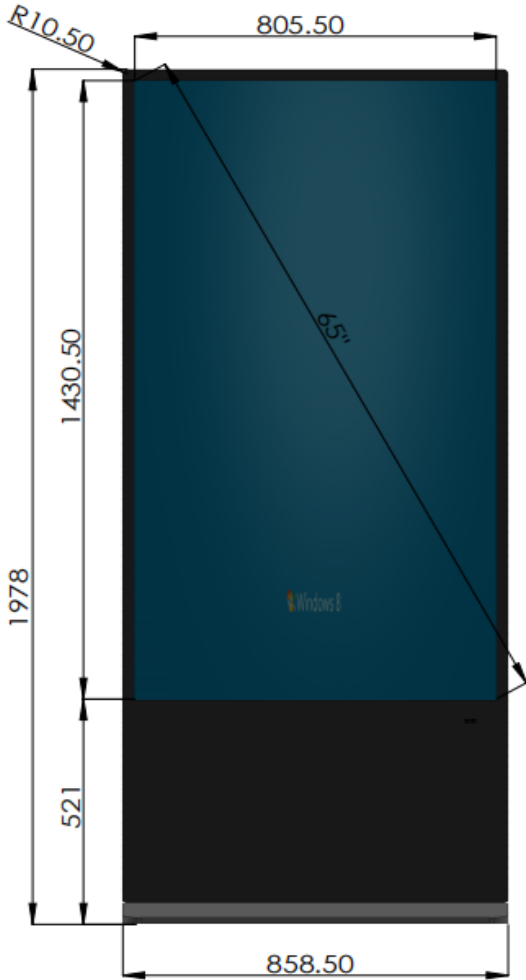

## Completed Projects in India

- ❑ Sheraton – Doha
- ❑ Hilton Garden Inn – Lucknow
- ❑ Four Point – Bangalore
- ❑ Double Tree Hilton – Agra
- ❑ Courtyard – Bangalore
- ❑ Courtyard – Trivandrum
- ❑ Fairfield – Jodhpur
- ❑ Fairfield – Bangalore
- ❑ Movenpick - Doha
- ❑ Hyatt Regency – Lucknow
- ❑ Crown Plaza – Jaipur
- ❑ Sarovar – Agra, Tirupati
- ❑ JW Marriott – Bangalore
- ❑ JW Marriott – Mumbai Sahar
- ❑ JW Marriott – Mussurie
- ❑ JW Marriott – Kolkata
- ❑ JW Marriott - Muscat
- ❑ Golden Tulip – Kuwait
- ❑ Golden Tulip - Dubai
- ❑ Swiss Bel - Bahrain
- ❑ Le Meridien - Dubai

## Delighted Customers



- ❑ Rotana - Bahrain
- ❑ Ramada – Agra
- ❑ Ritz Carlton – Bahrain
- ❑ Radisson Blue – Mumbai
- ❑ Radisson – Chennai
- ❑ Radisson – Noida
- ❑ Radisson – Coimbatore
- ❑ Radisson – Guwahati
- ❑ Novotel - Dubai
- ❑ Radisson – Ludhiana
- ❑ Radisson – Sohar Oman
- ❑ Radisson – Kandla
- ❑ Hyatt Place – Gurgaon
- ❑ Holiday Inn – Chennai
- ❑ IBIS – Bangalore
- ❑ IBIS Chennai
- ❑ IBIS – Hyderabad
- ❑ IBIS – Coimbatore
- ❑ IBIS – Kochi
- ❑ Rotana – Salalah Oman
- ❑ Renaissance – Lucknow
- ❑ ITC Rajputana - Jaipur



“Your Global Lighting & Controls Solutions Partner”



**EUROPE**

T: +44 (0) 1600 77 22 97 (UK)

**MIDDLE EAST & AFRICA**

T: +971 4 5584956 (UAE)

**INDIA & ASIA PACIFIC**

T: +91 124 4264701 / 08 (INDIA)